


09/778691

Europäisches  
PatentamtEuropean  
Patent OfficeOffice européen  
des brevets

EP 99 / 06377



Bescheinigung


Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.



Patentanmeldung Nr. Patent application No. Demande de brevet n°

99250214.6

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

11/10/99

**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 99250214.6

Anmeldetag:  
Date of filing:  
Date de dépôt: 01/07/99

Anmelder:  
Applicant(s):  
Demandeur(s):  
DEUTSCHE THOMSON-BRANDT GMBH  
78048 Villingen-Schwenningen  
GERMANY

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

Method for addressing a bit stream to be recorded or being recorded on a storage medium

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:	EP	Tag:	07/09/98
State:	EP	Date:	04/11/98
Pays:	EP	Date:	08/06/99

Aktenzeichen:	EPA	98250315
File no.	EPA	98250387
Numéro de dépôt:	EPA	99250179

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

01.07.1999

1

Method for addressing a bitstream to be recorded or being recorded on a storage medium

The invention relates to a method and to an apparatus for  
5 addressing a bitstream to be recorded or being recorded on a storage medium, e.g. an optical disc.

### Background

10

In bitstream recording one is free to subdivide the bitstream into sub-units of more regular structure. Presentation data in DVDs (digital video or versatile disc) is organised into units called Video Object Unit, denoted VOB, or Stream Object Unit, denoted SOBU, e.g. in the DVD VR Specification for DVD Video Recording in which the units are called VOBUs. VOBUs have a variable size (data amount measured in number of sectors), but have also a variable duration (measured in number of video fields). SOBUs have a constant size, but have also a variable duration.

15

For data retrieval from the disc the DVD VR specification foresees a 'VOBU map' which is a table where for every VOB in a recording the length in sectors and the duration in fields is entered.

20

25

### Invention

A table for data retrieval from a storage medium can be based on bitstream data being subdivided into pieces of constant duration. 'Duration' means the difference between the arrival time of the first packet of a piece and the arrival time of the packet following immediately the last packet of that piece.

35 'Housekeeping' in the general context of either DVD VR recording or Stream recording is the task to translate a given

time value (presentation time in case of DVD VR recording or packet arrival time in case of Stream recording) into a disc address value where the desired data can be found.

In such systems the VOB or SOBU map or 'mapping list', denoted MAPL, can contain a specific size or a specific offset or a specific delta size or, in general, a specific address-like quantity for each of these constant-duration pieces. By storing delta values instead of the total duration at a current VOB or SOBU these entries can be described with shorter word length which helps to keep the total MAPL in a reasonable size.

A possible type of housekeeping process for these systems could include the following steps:

- By division and truncation, calculate from the given time value the index of the mapping list entry to be looked up.
- The content of the mapping list entry either directly specifies the address value to access, or all mapping list entries up to that index have to be accumulated to get the address value to be accessed.

The big disadvantage of such type of MAPL which is based on constant-duration pieces lies in the following:

- In case of a low bitrate recording the pieces of constant duration will be small in size, i.e. every piece will comprise a few data sectors only or, in the extreme, a fraction of a data sector only. The disc can contain enormous numbers of those pieces, so that the MAPL may become too big to be kept in the memory.
- In case of high bitrate recording, the pieces of constant duration are big in size, i.e. each piece will comprise many data sectors. Then, addressing one piece or another corresponds to a very coarse addressing on the (sector) scale, i.e. a piece address derived from the MAPL can be located many sectors away from the currently desired location.

Therefore housekeeping based on constant-duration pieces can result in a too big MAPL in some cases (up to one half of the disc capacity), and can result in too coarse addressing in other cases.

5 It is one object of the invention to disclose a method for assigning to a given time value a storage medium address value which method avoids such disadvantages. This object is achieved by the method disclosed in claim 1.

10 According to the invention the mapping list MAPL is based on pieces of constant length or size, i.e. a constant number of bits per piece.

In a medium like DVD-RAM where data are physically organised into 'ECC blocks' (ECC: error correction code) of 32kByte  
15 length each, particular advantages result if the above constant size or a multiple of it is used as the constant size of a piece. However, any other constant size can be used. In this case of pieces of constant size the MAPL contains for each of these pieces of constant size a specific absolute  
20 duration or, preferably, a specific delta duration which indicates the arrival time of the first packet of a piece and the arrival time of the packet following immediately the last packet of that piece.

The housekeeping process, i.e. the computation of the target  
25 VOB or SOBU address includes the following steps:

- Accumulate the delta durations contained in the MAPL until the given time value is most closely reached towards the target VOB or SOBU, i.e. until the sum of delta durations is less than or equal to the given time value and the result after addition of the next delta duration is  
30 greater than the given time value assuming that forward scanning of the VOB or SOBU entries is performed, or until the sum of delta durations is greater than the given time value assuming that backward scanning of the VOB or  
35 SOBU entries is performed.
- The running index of this mapping list entry multiplied

by the constant piece size directly results in the address value to be accessed.

The advantages of the inventive constant-size based MAPL are:

- the MAPL size does not depend on the bitrate of the recordings,
- the MAPL addressing accuracy is constant, the granularity basically corresponds to the 'piece size constant' which can be chosen as appropriate to be constant for all types of discs, to be constant per disc, or to be constant per recording on a specific disc.

Advantageously, the address table contains an additional initialising value to initialise the accumulation of the delta time durations.

In principle, the inventive method is suited for addressing a bitstream to be recorded or being recorded on a storage medium, e.g. a DVD recorder, wherein an address table is used that is based on pieces of said bitstream, and wherein:

- said pieces each include a constant amount of bits of said bitstream;
- using a running index, to each address table entry for said pieces, in particular to each address table entry except the one having the highest index, a delta time duration is assigned in said address table;
- the address table contains in addition an initialisation value which allows to have a share of equal bits between a predetermined amount of MSBs of application time stamps and the same amount of LSBs of said delta time durations;
- in order to get an address value for reaching a target address said initialisation value and all delta time durations up to the nearest time duration corresponding to said address value become accumulated and the running index corresponding to the delta time duration entry related to said nearest time duration becomes multiplied by



said constant amount in order to compute said address value.

Advantageous additional embodiments of the inventive method  
5 are disclosed in the respective dependent claims.

### Drawings

10 Embodiments of the invention are described with reference to the accompanying drawings, which show in:  
Fig. 1 simplified overall system for DVD Stream Recording;  
Fig. 2 basic directory and file structure;  
Fig. 3 navigation data structure;  
15 Fig. 4 a stream pack;  
Fig. 5 inventive mapping list;  
Fig. 6 structure of this mapping list;  
Fig. 7 mapping list example;  
Fig. 8 comparison of several time values;  
20 Fig. 9 IAPAT structure;  
Fig. 10 APAT and PAT structure;  
Fig. 11 ATS structure.

### 25 Exemplary embodiments

The DVD VR stream recording system is designed to use rewritable DVD discs for recording existing digital bitstreams, editing them and playing them back as bitstreams.

30 The following abbreviations are used:

AP: Application Packet, APAT: Application Packet Arrival Time, ATS: Application Timestamp, IAPAT: Incremental APAT (delta values with 12 bit resolution), LB: Logical Block,  
35 LSBs: least significant bits, MAPL: Mapping List, MSBs: most significant bits, MTU\_SHFT: Mapping Time Unit Shift (an un-

signed integer value, e.g. 18), PAT: Packet Arrival Time, RBN: relative byte number, RBP: relative byte position, RLBN: relative logical block number, SCR: system clock reference, SOB: Stream Object, SOBU: Stream Object Unit,  
5 SOB\_E\_APAT: APAT of the last AP of the SOB, SOB\_S\_APAT: APAT of the first AP of the SOB, SOBU\_S\_APAT: APAT of the first AP of the SOBU, STB: set top box, SUM\_IAPAT = Summation of IAPAT values, TOC: table of content.

- 10 This system is designed to satisfy the following requirements:

A timing mechanism, i.e. a time stamp is added to every broadcast packet to enable proper packet delivery during playback.

- 15 To enlarge the fields of applications, non-real-time recording should be possible. However, in this case the STB has to generate the Time Stamp information.

Data allocation strategy and file support real-time stream recording.

- 20 Many digital services require Service Information which normally is embedded in the real-time stream. To support a STB fed by data from a DVD player, the DVD should provide additional space, which can be used by the STB to duplicate part of the service information and to add additional TOC information.  
25

Copy Protection must be supported. In addition, any scrambling performed by the service provider or the STB must be kept unchanged.

- User requirements can be grouped into requirements for recording, requirements for playback, and requirements for editing:  
30

#### *Real-time Recording*

The system should be designed to enable real-time recording of digital streams. It also should allow the user to concatenate recordings, even if those recordings consist of  
35 different stream formats. If recordings are concatenated, a

seamless or close to seamless playback possibility would be nice but is not required.

### *Navigation Support*

- 5 To support navigation two pieces of information (lists) should be generated during recording:

- 1) An 'original' version of a play list. This list contains quite low level information, e.g. time map or (broadcast) packet order of the recording. This list is accessible by  
10 the STB and the content is understood by the DVD streamer as well as by the STB. In its original version the playlist enables the playback of a complete recording. The playlist may be accessed and extended after recording by the STB to allow more sophisticated playback sequences.
- 15 2) The second piece of information, a mapping list, is generated to support the stream recorder to retrieve packet stream chunks (cells), that are described in terms of the application domain, e.g. 'broadcast packets' or 'time'. This list is owned and understood by the DVD streamer only.

20

### *Content Description*

- The system should reserve space which can be used by the STB to store high level TOC and Service Information. This information is provided for the user to navigate through the content stored on disc and may contain sophisticated GUI information.  
25 The content needs not to be understood by the stream recorder. However a common subset of the TOC information, e.g. based on a character string, may be useful to be shared between STB and DVD, in order to enable the stream recorder  
30 to provide a basic menu by itself.

Playback of individual recording and playing all recordings sequentially should be possible via play list.

### *35 Player menus for entry point selection*

The STB can generate a sophisticated menu based on the TOC

information stored on the disc. However, it should be possible to generate a simple menu by the streamer itself, e.g. via some 'character' information which is shared by STB and DVD.

5

*Trick play modes*

The STB should be able to steer trick play via the 'play list'. Due to the nature of the broadcast stream, the trick play features may be limited to basic ones, e.g. Time Search and Title Jump.

10

User defined playback sequence features like programming or parental control can be supported via the play list

The DVD streamer should create the 'original version' of the play list. It also should allow extensions and modifications of the play list by the STB for more sophisticated playback features. The DVD streamer is not responsible for the content of those sophisticated playlist(s).

15

- 20 The system must support the deletion of single recordings on user's request. If possible, the system should allow this feature under the control of the STB.  
The system may support insert editing.

- 25 In the simplified overall system of Fig. 1 an application device AD interacts via an interface IF, e.g. an IEEE1394 interface, with a streamer device STRD, i.e. a DVD recorder. A streamer STR within STRD sends its data via output buffering & timestamping handling means BTHO to IF and receives  
30 from IF data via input buffering & timestamping handling means BTHI. AD sends its data via output buffering & timestamping handling means BTHO to IF and receives from IF data via input buffering & timestamping handling means BTHIAD.

- 35 Concerning the directory and file structure, the organisation of Stream Data and Navigation Data of DVD Stream Re-

cording is done in a specific way such as to take into account the following:

- Any DVD Streamer device STRD has certain requirements to store its own mapping list or Streamer-specific navigation data on the disc. These data are solely for helping the retrieval of recorded data; they need not be understood or even be visible to any outside application device AD.
- Any DVD Streamer device STRD needs to communicate with the application device AD it is connected to. This communication should be as universal as possible so that the maximum possible range of applications can be connected to the Streamer. The Navigation Data to support such communication are called Common navigation data and must be understandable by the Streamer as well as by the application device.
- The Streamer device STRD should offer to the connected application device AD a means for storing its own private data of any desired kind. The Streamer needs not to understand any of the content, internal structure, or meaning of this Application-specific navigation data.

Fig. 2 illustrates a possible directory and file structure where all the data comprising the disc content are. The files storing the disc content are placed under the STRREC directory which is under the root directory. Under the STRREC directory the following files are created:

- COMMON.IFO  
Basic information to describe the stream content. Needs to be understood by the Application Device as well as the Streamer.
- STREAMER.IFO  
Private stream object information specific to the Streamer Device. Needs not to be understood by the Application Device.
- APPLICAT.IFO

Application Private Data, i.e. information that is specific to the Application(s) connected to the Streamer. Needs not to be understood by the Streamer.

- REALTIME.SOB

5 Recorded real-time stream data proper.

Note that except for the files described above, the STRREC directory shall not contain any other files or directories.

Concerning the navigation data structure, Navigation data is provided to control the recording, playing back, and editing of any bitstreams that are recorded. As shown in Fig. 3, Navigation Data includes Streamer Video Manager Information (STR\_VMGI) as contained in the file named COMMON.IFO and Stream File Information (SFI) as contained in the file named STREAMER.IFO. From the point of view of the Streamer Device, these two kinds of information are sufficient to perform all necessary operations.

In addition to these, DVD Stream Recording also foresees the possibility of reserving a storage location for Application Private Data APD\_MG, which may in general also be considered as Navigation Data.

STR\_VMGI and SFI are the Navigation Data which are directly relevant for the Streamer operation. STR\_VMGI includes two kinds of information tables, namely Video Manager Information Management Table (VMGI\_MAT) and Play List Search Pointer Table (PL\_SRPT), in this order. SFI includes three kinds of information tables, namely Stream File General Information (SF\_GI), SOBI Search Pointers #n (SOBI\_SRP#n) and all Stream Object Information #n (SOBI#n), in this order.

30 There is no restriction in Stream Recording that each table within Navigation Information must be aligned with a sector boundary.

VMGI\_MAT includes information items like end address of Streamer Information (STRI), end address of STR\_VMGI, start address of Stream File Information Table (SFIT), start address of Original Program Chain Information (ORG\_PGCI) and

11

start address of User Defined Program Chain Information Table (UD\_PGCIT).

PL\_SRPT includes information items like Number of Playlist Search Pointers, end address of PL\_SRPT, Program Chain numbers of Playlist Information, Playlist Create Time and Primary Text Information.

Stream Object Information General Information (SOBI\_GI) includes information items like SOB Type (SOB\_TY), SOB Recording Time (SOB\_REC\_TM), SOB Stream Information Number (SOB\_STI\_N), Access Unit Data Flags (AUD\_FLAGS), SOB Start APAT (SOB\_S\_APAT), SOB End APAT (SOB\_E\_APAT), first SOBU of this SOB (SOB\_S\_SOBU), number of Mapping List entries (MAPL\_ENT\_Ns).

MAPL\_ENT\_Ns describes the number of mapping list entries to follow after SOBI\_GI.

The purpose of the inventive Mapping List MAPL is to provide all necessary information so that given playlist entries are efficiently translated into disc address pairs, and viceversa.

It is also possible to include Application Private Data which consist of three kinds of information, namely Application Private Data General Information, a set of one or more Application Private Data Search Pointers, and a set of one or more Application Private Data Area. If any Application Private Data exists, these three kinds of information become recorded and stored in this order in the APPLICAT.IFO file.

Stream Data include one or more Stream Objects (SOBs) each of which can be stored as a 'Program stream' as described in ISO/IEC 13818-1, Systems.

A SOB can be terminated by a program\_end\_code. The value of the SCR field in the first pack of each SOB may be non-zero. A SOB contains the Stream Data packed into a sequence of

'Stream Packs' (S\_PCKs). Stream data can be organised as one elementary stream and are carried in PES packets with a stream\_id.

- 5 As shown in Fig. 4 a Stream Pack includes a 14-byte pack header and a Stream PES Packet to which a 6-byte PES packet header, a Substream ID byte and a Stream Data Area belongs. The Stream Data Area is headed by a 9-byte Application Header and optionally by an Application Header Extension, 10 whereby the remaining part is the Application Packet Area. A Stream Object is composed of one or more Stream Packs.

The MAPL table depicted in Fig. 5 contains n pieces or SOBU#1 to SOBU#n of the bitstream to be recorded or of the 15 recorded bitstream. To SOBU#1 to SOBU#n-1 a corresponding Incremental Application Packet Arrival Time entry IAPAT#1 to IAPAT#n-1 is assigned. DAV denotes a desired address or target address in the bitstream. SOBU#1 to SOBU#n each concern a constant number of bits of the bitstream.

20

As shown in Fig. 6, the Mapping List includes the Initial Time of the MAPL IAPAT#0 and zero or more instances of "Incremental Application Packet Arrival Time" (IAPAT).

	Contents	Number of Bytes
(1) IAPAT	Incremental APAT	2
	Total	2

- 25 The structure of the IAPAT value is depicted in Fig. 9. IAPAT describes the Incremental Application Packet Arrival Time of the corresponding Stream Object Unit in DVD Stream Recording's Incremental PAT Describing Format defined below.

- 30 For an explanation on how to calculate IAPAT(i) during recording, the following notations will be used:



- For abbreviation,  $M$  shall denote the number of Mapping List entries  $MAPL\_ENT\_Ns$ .
- $SOBU\_S\_APAT(i)$  ( $1 \leq i \leq M$ ) shall denote the start Application Packet Arrival Time of the Stream Object Unit # $i$  of the Stream Object, i.e. the packet arrival time of the first packet belonging to the Stream Object Unit # $i$ .  
 $SOBU\_S\_APAT(1)$  shall be equal to the Application Time Stamp of the first Application Packet of Stream Object Unit #1 of the Stream Object.
- $IAPAT(0)$  shall denote the initial value for the Mapping List.
- $IAPAT(i)$  shall denote the  $i$ -th entry of the Mapping List, i.e.  $IAPAT(0)$  is the first and  $IAPAT(M-1)$  is the last entry of the Mapping List.
- $SUM\_IAPAT(i)$  shall denote the summation of the  $IAPATs$  from 0 to  $i$  ( $i < M$ )  

$$SUM\_IAPAT(i) = IAPAT(0) + IAPAT(1) + \dots + IAPAT(i) \quad (eq\ 1)$$
with  $SUM\_IAPAT(-1) = 0$ .
- Then  $IAPAT(i)$  shall be chosen such that  

$$IAPAT(i) = \text{floor}(SOBU\_S\_APAT(i+1)/2^{MTU\_SHIFT}) - SUM\_IAPAT(i-1) \quad (eq\ 2)$$
for  $i = 0, 1, 2, \dots, M-1$ .
- The  $IAPAT$  value range is limited by the resolution (12 bit) of an  $IAPAT$  value and its minimum value ( $IAPAT(i) = 1$  for  $i > 0$  and  $IAPAT(0) = 0$ ):  

$$0 \leq IAPAT(0) < 2^{12} \quad (eq\ 3)$$
and  

$$1 \leq IAPAT(i) < 2^{12} \quad \text{for } i > 1 \quad (eq\ 4)$$

The floor function  $\text{floor}(x)$  rounds down, e.g.  $\text{floor}(1.2) = \text{floor}(1.8) = 1$ ,  $\text{floor}(-1.2) = \text{floor}(-1.8) = -2$ .

$SOBU\_S\_APAT(i)$  is described in the DVD Stream Recording PAT Describing Format. But, in evaluating the equations above

they must be treated as if they were 6 byte unsigned integer values.

Fig. 7 shows, along the time axis, an example of the order of SOBU, SOBU\_S\_APAT and IAPAT. The left side of the time axis is divided into 'Mapping Time Units' and the right side of the time axis shows the SOBUs.

Mapping Time Unit is a duration corresponding to IAPAT = 1, and can be calculated as

Mapping Time Unit =  $(2^{(\text{MTU\_SHIFT}-9)} / 90000)$  seconds (eq 5)

For MTU\_SHFT = 18 bit it corresponds to approx. 5.69 milliseconds.

SOB\_S\_APAT describes the start Application Packet Arrival Time of a Stream Object, i.e. the packet arrival time of the first packet belonging to the SOB. SOB\_S\_APAT is described below in the DVD Stream Recording PAT Describing Format: PATs consist of a base part and an extension part. The base part holds the so-called 90kHz unit value, and the extension part holds the less significant value measured in 27MHz units.

(a) Choosing SOB\_S\_APAT for a new recording

A newly recorded SOB will normally start with the first Application Packet of a SOBU. In this case, SOB\_S\_APAT and the Application Timestamp of the first Application Packet of the SOB will normally be set to 0.

(b) Calculation of SOB\_S\_APAT after editing

After editing, e.g. deleting the start of a SOB, SOB\_S\_APAT, the Application Timestamp of the first Application Packet of the first SOBU of the SOB and the Application Timestamp of the first Application Packet belonging to the SOB may differ and may be not equal to 0.

All possible cases are covered by the following general definition of SOB\_S\_APAT:

15

- let  $ats_e$  be the 30-bit Application Timestamp of the first Application Packet belonging to the SOB and
- let  $N$  be the number of all Application Timestamp wrap-arounds occurring between the 30-bit Application Timestamp of the first Application Packet starting in the first SOBU of the SOB and  $ats_e$ , i.e.  $0 \leq N \leq 1$ , then

SOB\_S\_APAT[MTU\_SHFT + 11...0] =  $ats_e$ [MTU\_SHFT + 11...0]

SOB\_S\_APAT[47...MTU\_SHFT + 12] =  $N$

- 10 With this definition of SOB\_S\_APAT, the APAT of the first Application Packet starting in the first SOBU of the SOB is equal to or greater than 0 and less than  $2^{MTU\_SHIFT+12}$ .

Fig. 10 shows the DVD Stream Recording PAT Describing Format. The variables in this figure are defined as follows:

PAT\_base: PAT's base value measured by 90kHz unit

PAT\_exten: PAT's extension value measured by 27MHz unit

( $0 \leq PAT\_exten < 300$ )

PAT in seconds =  $(PAT\_base/90000Hz) + (PAT\_exten/27000000Hz)$

20

For an unique representation of times, PAT\_exten must be in the range of  $0 \leq PAT\_exten < 300$ . Together, PAT\_base and PAT\_exten cover a range of more than 1696 hours.

- 25 SOB\_E\_APAT describes the end Application Packet Arrival Time of the Stream Object, i.e. the packet arrival time of the last packet belonging to the SOB, in the DVD Stream Recording PAT Describing Format. The general definition of SOB\_E\_APAT is as follows:

- 30 • let  $ats_e$  be the 30-bit Application Timestamp of the last Application Packet belonging to the SOB and
- let  $N$  be the number of all Application Timestamp wrap-arounds occurring between the 30-bit Application Timestamp of the first Application Packet starting in the first SOBU of the SOB and  $ats_e$ , i.e.  $N \geq 0$ , then
- 35

16

$$\text{SOB\_E\_APAT}[\text{MTU\_SHFT} + 11 \dots 0] = \text{ats}_e[\text{MTU\_SHFT} + 11 \dots 0]$$

$$\text{SOB\_E\_APAT}[47 \dots \text{MTU\_SHFT} + 12] = N$$

The Application Time Stamp (ATS) in front of each Application packet consists of a 30-bit value. An ATS includes a base part and an extension part. The base part holds the so-called 90kHz unit value, and the extension part holds the less significant value measured in 27MHz units.

Fig. 11 depicts the DVD Stream Recording Application Time Stamp Describing Format. The variables in this figure are defined as follows:

AU\_START when set to '1', indicates that the associated Application Packet contains a random access entry point (start of a random access unit) into the stream

AU\_END when set to '1', indicates the associated Application Packet is the last packet of a random access unit

ATS\_base base value of ATS measured in 90kHz units

ATS\_exten extension value of ATS measured in 27MHz units

$$\text{ATS in seconds} = (\text{ATS\_base}/90000\text{Hz}) + (\text{ATS\_exten}/27000000\text{Hz})$$

For a unique representation of times, ATS\_exten must be in the range of  $0 \leq \text{ATS\_exten} < 300$ . Together, ATS\_base and ATS\_exten cover a range of more than 23 seconds.

Fig. 8 depicts the value ranges of ATS, IAPAT and SUM\_IAPAT with respect to the 48-bit range of APAT. ATS covers bits 0 to 29. IAPAT covers bits 18 to 29. SUM\_IAPAT covers bits 18 to 47.

A significant advantage of the invention is that the mapping list generates timestamps SUM\_IAPAT of which the 12 LSB bits No. 18 to 29 are identical to the 12 MSB bits No. 18 to 29 of the stream timestamps ATS. This feature allows to simplify the real-time recorder hardware.

*Example function for scanning the Presentation Data until the desired Application Packet is found*

The following function describes how to scan Presentation Data in order to retrieve an individual application packet associated with a Packet Arrival Time 'x'. Thereby the Mapping List and the access to it is described in more detail, e.g. internal intermediate values which are required in subsequent steps, see Fig. 5, 6 and 7. The main result of Mapping List access is the Sector offset SOFF, indicating where the scanning starts. The complete scanning will be carried out inside a given SOB.

Notes on nomenclature used:

- x48 is a 6-byte APAT value which is indicated below by '48'.
- The value '30' attached to other variables indicates that they consist of 30 bits, e.g. Application Time Stamp ATS.
- IAPAT(0), IAPAT(1),... denote the entries of the Mapping List.
- The form var[a...b] denotes the bit field between and including bits a and b of the variable var.
- '[i ... k]' denotes bits i to k of a binary number, i = MSB, k = LSB .
- '/\*...\*/' denotes explanatory comments.

In order to simplify the example it is assumed that each sector contains an integer number of at least one application packet(s).

Function get\_application\_packet\_location(x48)

- sum\_iapat48 = IAPAT(0) \* 2<sup>MTU\_SHIFT</sup>; k = 1
- ss48 = IAPAT(k) \* 2<sup>MTU\_SHIFT</sup>
- if (sum\_iapat48 + ss48)[47...18] ≥ x48[47...18], then go to g)
- sum\_iapat48 = sum\_iapat48 + ss48
- k = k + 1

18

```

f) if k < MAPL_ENT_Ns, then go to b)
g) soff = (k-1)*SOBU_SZ /* sector
   offset of SOBU#(k) relative to the 1st SOBU of the SOB */
h) offset48[47...30] = sum_iapat48[47...30]
5 i) offset48[29...0] = 0
j) current_ats30 = 0;
k) ap_no = 1
   /* Number of AP within Sector, 1 ≤ ap_no ≤ AP_Ns */
l) previous_ats30 = current_ats30
10 m) current_ats30 = (ATS of the application packet #ap_no of
   sector #soff)
n) if previous_ats30 is greater than current_ats30, then
   offset48 = offset48 + 230 /*handle ATS wrap around */
o) if current_ats30 + offset48 = x48 then
15 go to s) /* target found! */
p) if sector #soff contains at least one more application
   packet start, then
   ap_no = ap_no + 1
   go to m)
20 q) soff = soff + 1
r) go to k)
s) end of function

```

25 The desired application packet is now retrieved as packet  
 #ap\_no of sector #soff. A value of ap\_no = 1 denotes the  
 first Application Packet starting in the Sector. A value of  
 soff = 0 denotes the first Sector of the first SOBU of the  
 SOB.

30 The above function is a more general example. It can be sim-  
 plified if MTU\_SHFT < 19. This requirement is fulfilled be-  
 cause MTU\_SHFT is defined as 18.  
 a) sum\_iapat30 = IAPAT(0); k = 1

19

```
b) sum_iapat30 = sum_iapat30 + IAPAT(k)
c) if sum_iapat30 ≥ x48[47...18], then go to f)
d) k = k + 1
e) if k < MAPL_ENT_Ns, then go to b)
5 f) soff = (k-1)*SOBU_SZ /* sector off-
   set of SOBU #(k) relative to the 1st SOBU of the SOB */
g) ap_no = 1
   /* number of AP within Sector, 1 ≤ ap_no ≤ AP_PKT_Ns */
h) if (ATS of the application packet #ap_no of sector #soff)
10 equal to x48[29...0], then
   go to l) /* target found! */
i) if sector #soff contains at least one more application
   packet start, then
   ap_no = ap_no + 1
15 go to h)
j) soff = soff + 1
k) go to g)
l) end of function
```

20 The desired application packet is now retrieved as packet #ap\_no of sector #soff. A value of ap\_no = 1 denotes the first Application Packet starting in the Sector. A value of soff = 0 denotes the first Sector of the first SOBU of the SOB.

25 The 30 bits of ATS have the same weight as the 30 LSBs of APAT.

It is not required that the first sector of the first SOBU of a SOB belongs to this SOB. If the first part of a SOB was erased, then the remaining SOB may start in the middle of a  
30 SOBU, i.e. the first sector of this SOBU is not part of the SOB.

In Stream recording, the application performs its own padding, so that the pack length adjustment methods of DVD-ROM

20

Video or DVD-VR need not to be used. In Stream recording it is safe to assume, that the Stream packets will always have the necessary length.

The data stream also contains application time stamps ATS,  
5 e.g. within the data packets.



Claims

1. Method for addressing a bitstream to be recorded or being recorded on a storage medium (STRD), wherein an address table (MAPL) is used that is based on pieces (SOBU#n) of said bitstream, **characterised** by:
  - said pieces (SOBU#n) each include a constant amount of bits of said bitstream;
  - using a running index (0, 1, 2, 3, ..., n-1), to each address table entry for said pieces, in particular to each address table entry except the one having the highest index, a delta time duration (IAPAT#n) is assigned in said address table;
  - the address table contains in addition an initialisation value (IAPAT#0) which allows to have a share of equal bits between a predetermined amount of MSBs of application time stamps (ATS) and the same amount of LSBs of the summation of said delta time durations (IAPAT#n);
  - in order to get an address value for reaching a target address (DAV) said initialisation value (IAPAT#0) and all delta time durations (IAPAT#1, ... IAPAT#n-1) up to the nearest time duration value corresponding to said address value become accumulated, and the running index (i) corresponding to the delta time duration entry (IAPAT#i) related to said nearest time duration value becomes multiplied by said constant amount in order to compute said address value.
2. Method according to claim 1, wherein said storage medium (STRD) is a Streamer device or a DVD recorder.
3. Method according to claim 1 or 2, wherein said pieces (SOBU#n) of said bitstream contain data packets and a delta time duration value which is the difference between the arrival time of the first packet of a piece and the arrival time of the packet following immediately the last

packet of that piece.

4. Method according to any of claims 1 to 3, wherein the  
size of a piece corresponds to the number of bits of an  
5 ECC block or a multiple thereof.
5. Method according to any of claims 1 to 4, wherein said  
initialisation value corresponds to some, in particular  
12, MSBs of the application time stamp (ATS) of the first  
10 application packet of the first piece (SOBU) which is de-  
scribed by said address table (MAPL).
6. Method according to any of claims 1 to 5, wherein said  
address table is a mapping list (MAPL).

1/4

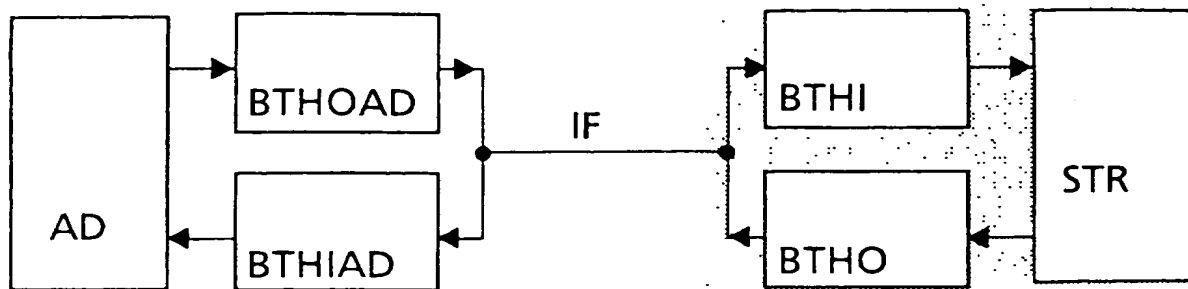


Fig.1

STRD

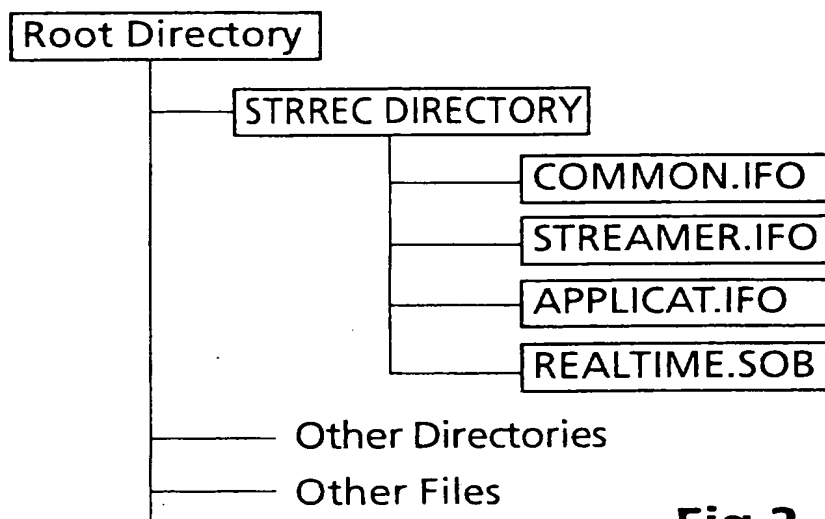


Fig.2

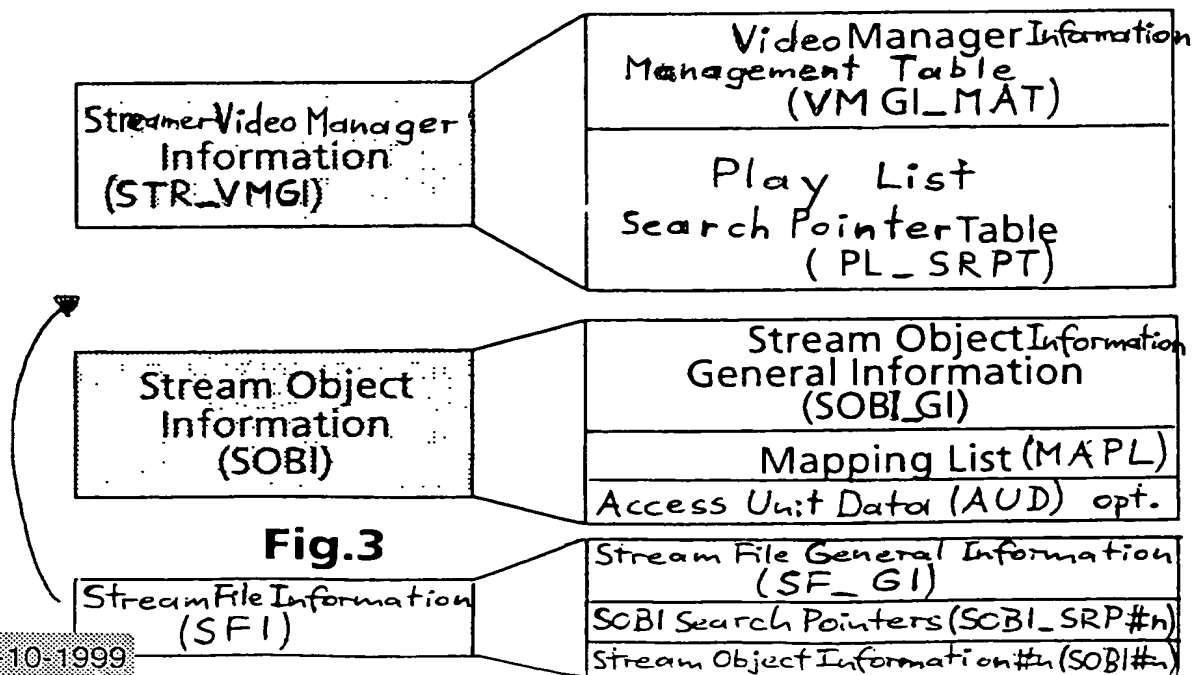


Fig.3

PD 990039

2/4

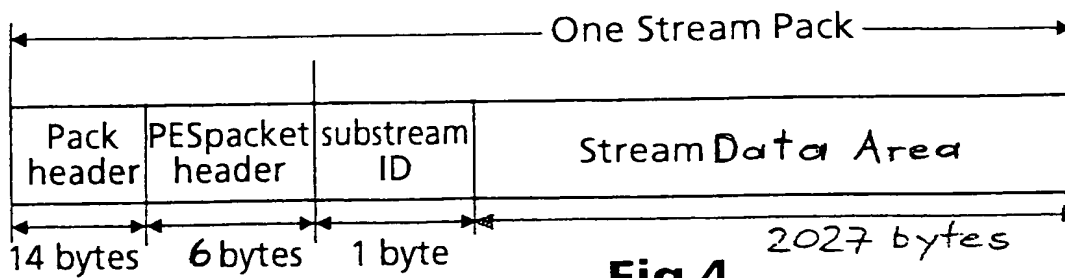


Fig.4

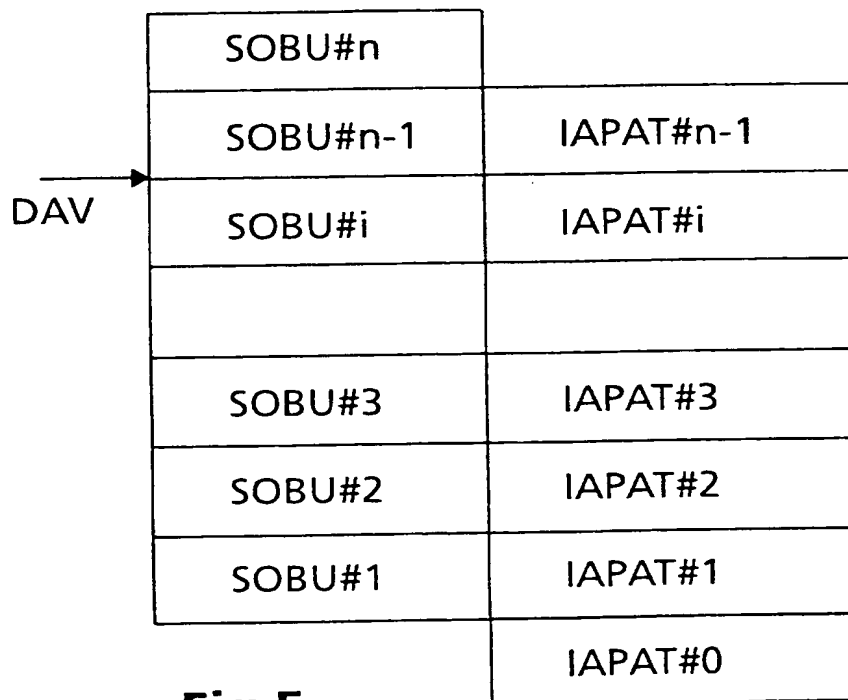


Fig.5

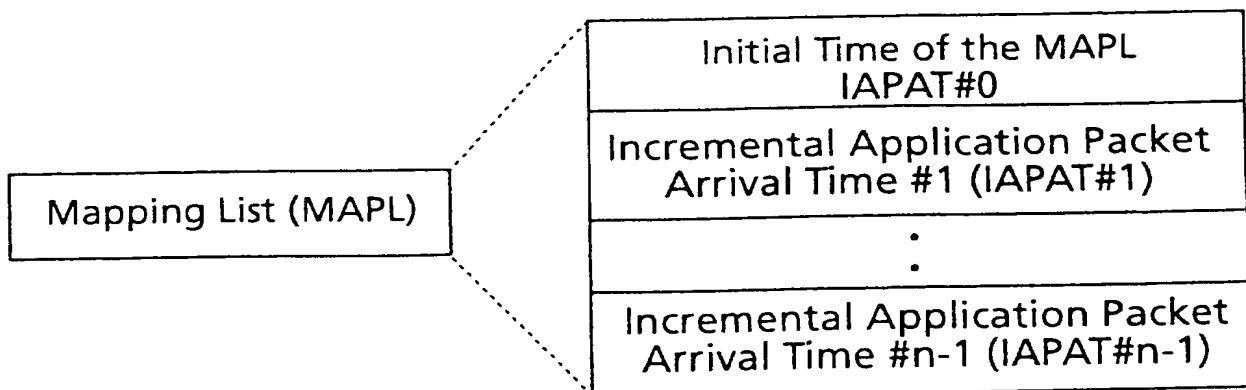


Fig.6

PD 990039

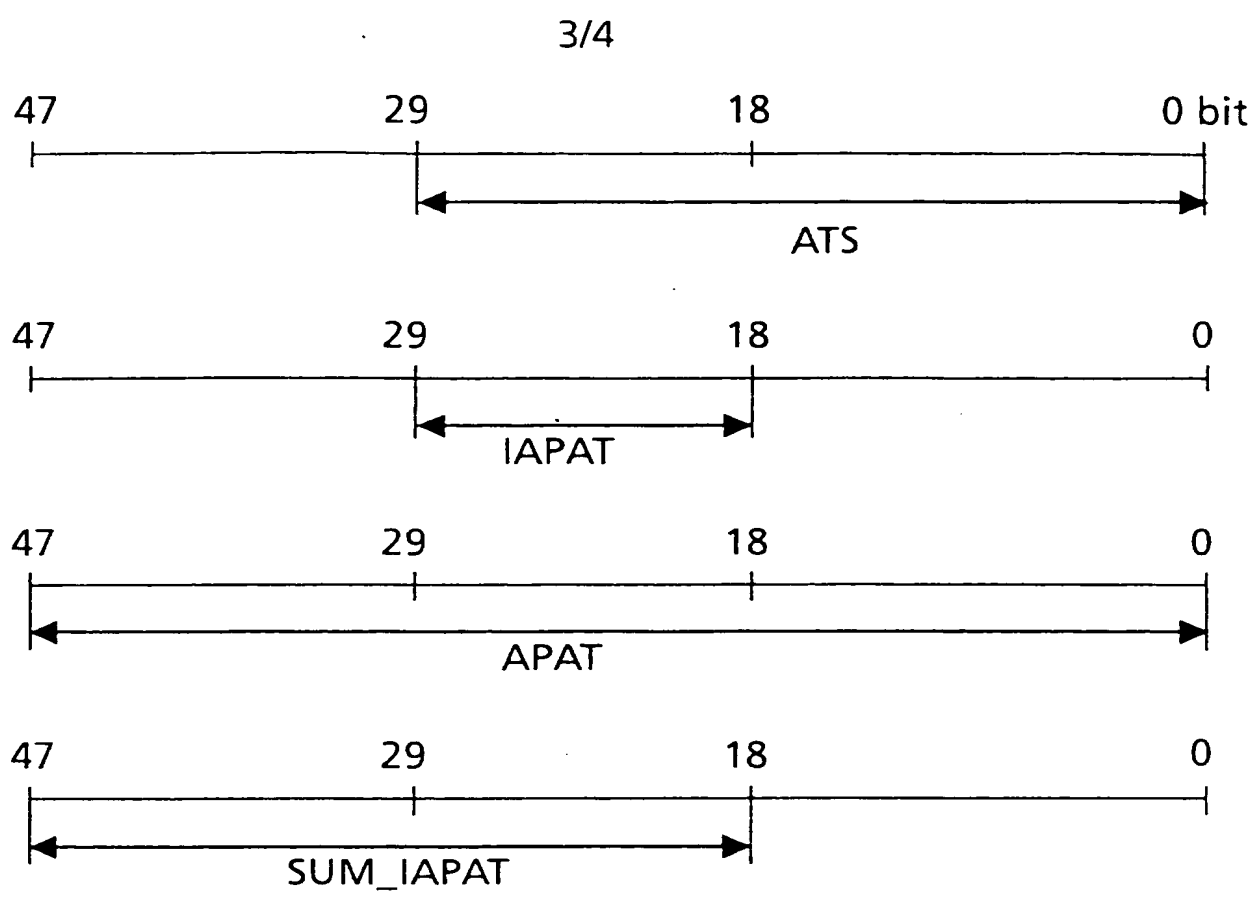


Fig.8

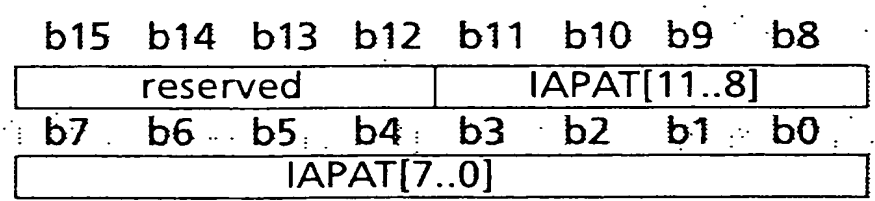


Fig.9


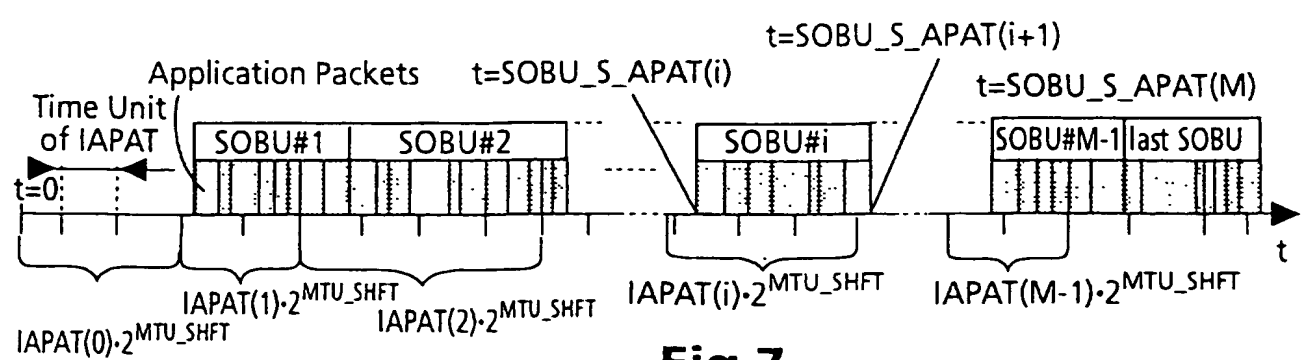



Fig.7

PD 990039

4/4

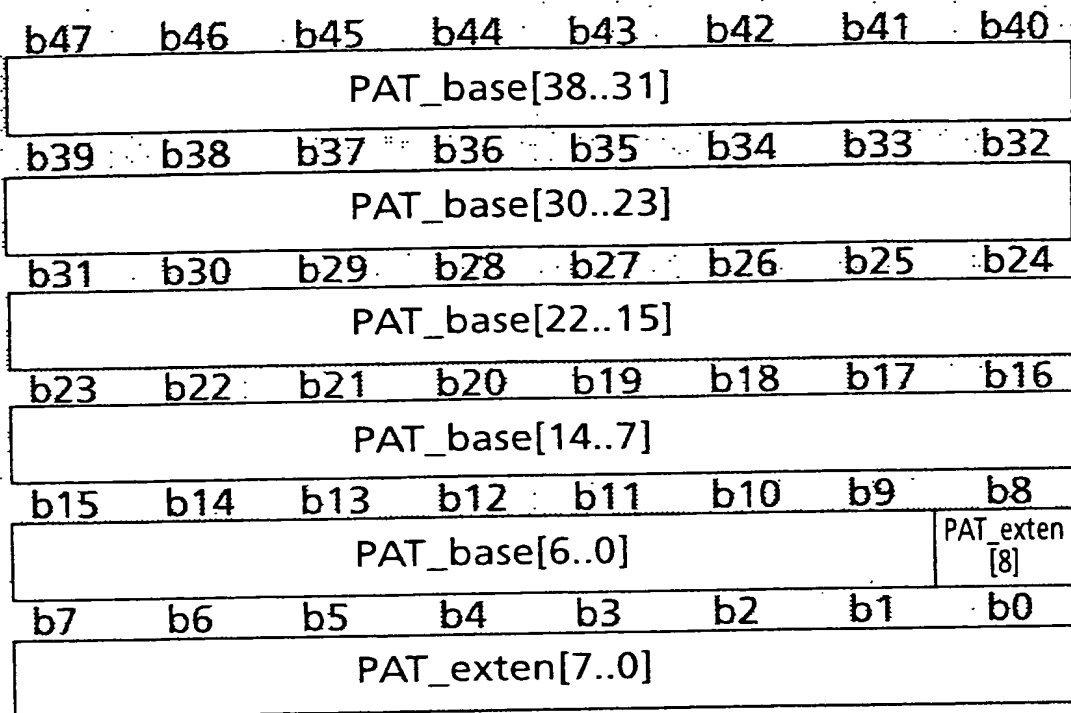

**Fig.10**

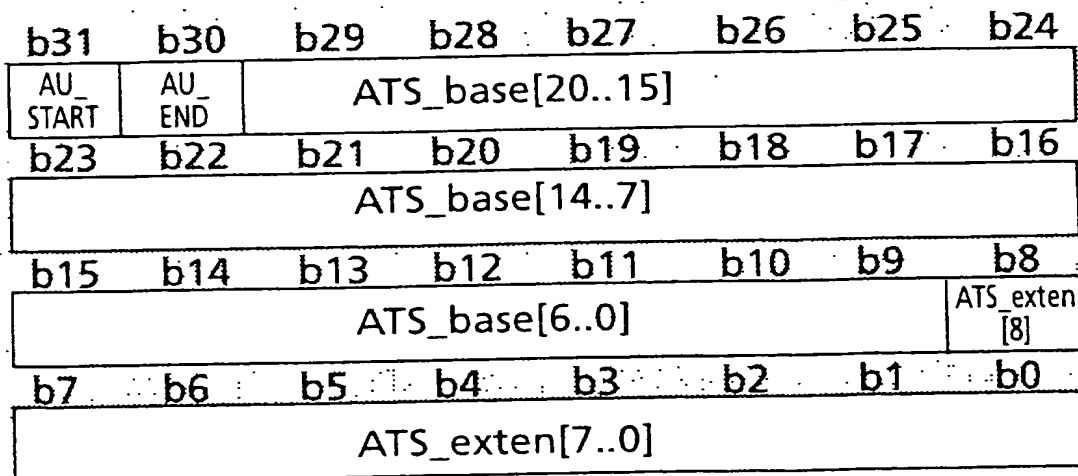

**Fig.11**

Abstract

In bitstream recording presentation data is organised into Video Object Units. These have a variable size but have also a variable duration. To allow access to any Video Object Unit in the bitstream a mapping list is used which is based on pieces (SOBU#n) of the bitstream of constant size per piece. The mapping list additionally contains for each of these pieces a specific delta duration (IAPAT#n) which indicates the difference between the arrival time of the first packet of a piece and the arrival time of the packet following immediately the last packet of that piece, and contains an initialisation value (IAPAT#0) which allows to have a share of equal bits between a predetermined amount of MSBs of application time stamps (ATS) and the same amount of LSBs of the summation of said delta time durations (IAPAT#n). The computation of the target SOBU address includes the following steps:

- accumulate the initialisation value and the delta durations until the given time value is most closely reached towards the target SOBU;
- the running index of this table entry multiplied by the constant piece size directly results in the address value to be accessed.

Fig. 5

**THIS PAGE BLANK (USPTO)**